


TRIPOD EQUAL LEG, ANCHOR FRAME

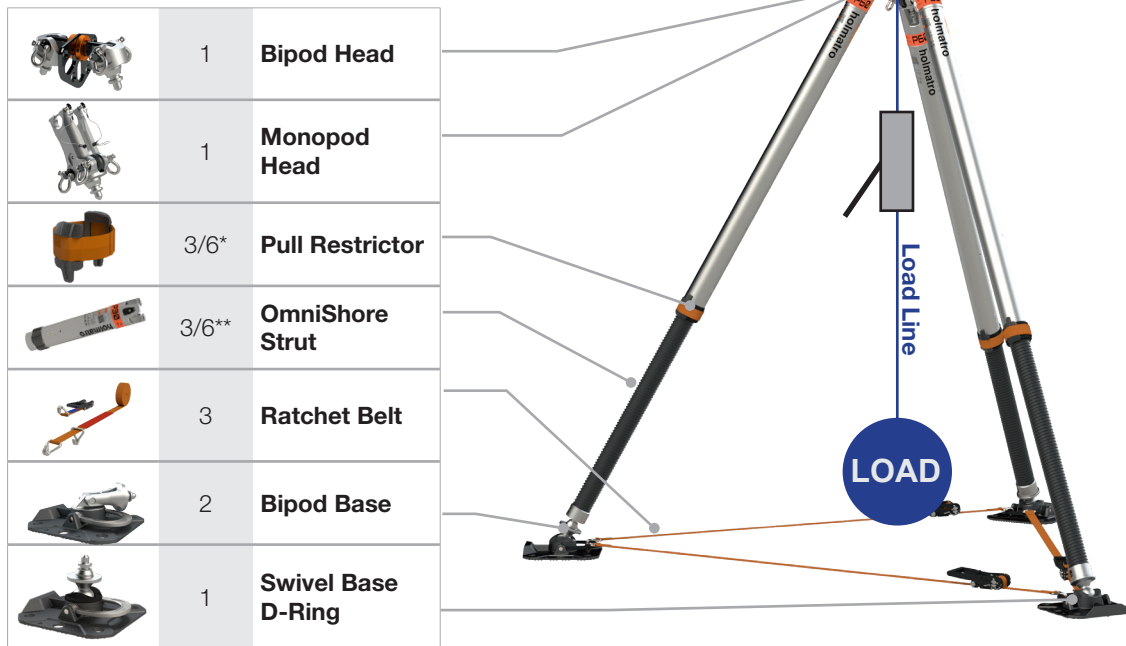

*optional


** depends on configuration

Max. Load Tripod (Safety Factor 4)					
Strut Length	cm	≤ 400	450	500	520
Max. Load	kg	2450	2150	1700	1400

Notes

- Ensure equal spacing between the baseplates
- Ensure the load line goes straight down from the center of the tripod head
- Guy lines are not required.
- The load table is valid only for the configuration shown above and provided that all instructions are followed.
- The user is responsible for selecting suitable lines, carabiners, and other rigging components.
- The shoring construction and installation must be approved by a trained Rope Rescue Specialist.

Top View

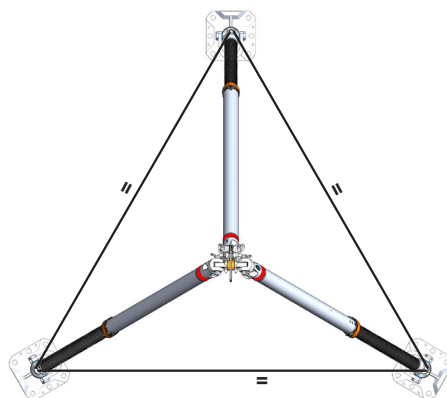

© Holmatro 2026-08-10

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.

