


Technical specification sheet

ICCU10 (excl. battery) | Mini Cutter

Specifications		
article number		101.003.081
model		ICCU10 (excl. battery)
cutter type		Battery
short description		Mini Cutter
battery included		no
max. working pressure	bar/Mpa	720 / 72
max. cutting opening	mm	59
max. cutting force	kN/t	220 / 22.4
protection rate		IP54
sound emission @ 1m/3.25ft	dB(A)	74
sound emission @ 4m/13ft	dB(A)	65
hydraulic oil type		ISO-L HV VG 36
weight, ready for use	kg	4.9
dimensions (LxWxH)	mm	544 x 92 x 145
temperature range	°C	-20 +55
weight (excl. battery)	kg	4.5
max. cutting diameter round bar (S235 acc. to EN 10025-2)	mm	22

Technical drawing dimensions		
dimension A	mm	544
dimension B	mm	145
dimension C	mm	92

Required Accessories		
Battery CAS CBPA182		101.003.082
Battery charger CBCH1 (AC-EU)		101.003.083
Battery charger CBCH2 (AC-NA)		101.003.084
Battery charger CBCH5 (AC-UK)		101.003.085

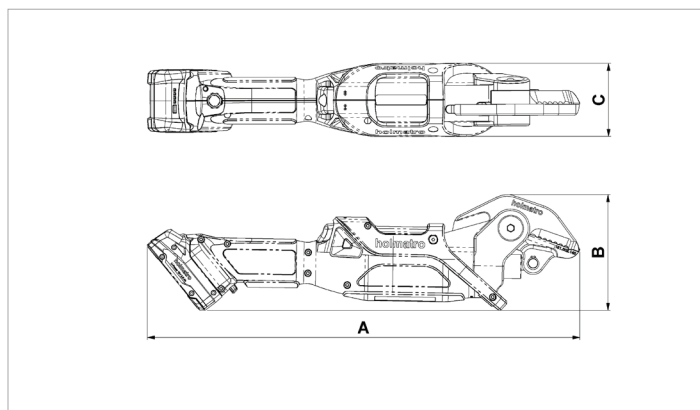

[holmatro.com](https://www.holmatro.com)

© Holmatro 2026-07-21

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.